


# ZA 1 2 TAILLE DES STOCKS CREUX

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 1 1/2              | 0.250 | 1     | 3.97  |
| 1 3/4              | 0.375 | 1     | 5.82  |
|                    | 0.500 | 3/4   | 6.61  |
| 2                  | 0.250 | 1 1/2 | 5.56  |
|                    | 0.375 | 1 1/4 | 6.88  |
|                    | 0.500 | 1     | 7.94  |
| 2 1/4              | 0.250 | 1 3/4 | 6.35  |
|                    | 0.375 | 1 1/2 | 7.94  |
|                    | 0.500 | 1 1/4 | 9.26  |
|                    | 0.563 | 1 1/8 | 9.82  |
| 2 1/2              | 0.250 | 2     | 7.14  |
|                    | 0.375 | 1 3/4 | 8.99  |
|                    | 0.500 | 1 1/2 | 10.58 |
|                    | 0.625 | 1 1/4 | 11.90 |
|                    | 0.688 | 1 1/8 | 12.47 |
| 2 3/4              | 0.750 | 1     | 12.96 |
|                    | 0.250 | 2 1/4 | 7.94  |
|                    | 0.375 | 2     | 10.05 |
|                    | 0.500 | 1 3/4 | 11.90 |
|                    | 0.625 | 1 1/2 | 13.49 |
|                    | 0.750 | 1 1/4 | 14.81 |
|                    | 0.875 | 1     | 15.87 |

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 3                  | 0.250 | 2 1/2 | 8.73  |
|                    | 0.375 | 2 1/4 | 11.11 |
|                    | 0.500 | 2     | 13.23 |
|                    | 0.625 | 1 3/4 | 15.08 |
|                    | 0.750 | 1 1/2 | 16.67 |
|                    | 0.875 | 1 1/4 | 17.99 |
| 3 1/4              | 1.000 | 1     | 19.05 |
|                    | 0.250 | 2 3/4 | 9.52  |
|                    | 0.375 | 2 1/2 | 12.17 |
|                    | 0.500 | 2 1/4 | 14.55 |
|                    | 0.625 | 2     | 16.67 |
|                    | 0.750 | 1 3/4 | 18.52 |
|                    | 0.875 | 1 1/2 | 20.10 |
| 3 1/2              | 1.000 | 1 1/4 | 21.43 |
|                    | 0.375 | 2 3/4 | 13.23 |
|                    | 0.500 | 2 1/2 | 15.87 |
|                    | 0.625 | 2 1/4 | 18.25 |
|                    | 0.750 | 2     | 20.37 |
|                    | 0.875 | 1 3/4 | 22.22 |
|                    | 1.000 | 1 1/2 | 23.81 |
|                    | 1.125 | 1 1/4 | 25.13 |
| 3 3/4              | 1.250 | 1     | 26.19 |
|                    | 0.375 | 3     | 14.28 |
|                    | 0.500 | 2 3/4 | 17.19 |
|                    | 0.625 | 2 1/2 | 19.84 |

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 3 3/4              | 0.725 | 2 1/4 | 22.22 |
|                    | 0.875 | 2     | 24.34 |
|                    | 1.000 | 1 3/4 | 26.19 |
| 4                  | 0.375 | 3 1/4 | 15.34 |
|                    | 0.500 | 3     | 18.52 |
|                    | 0.625 | 2 3/4 | 21.43 |
|                    | 0.750 | 2 1/2 | 24.07 |
|                    | 0.875 | 2 1/4 | 26.45 |
|                    | 1.000 | 2     | 28.57 |
| 4 1/4              | 0.375 | 3 1/2 | 16.40 |
|                    | 0.500 | 3 1/4 | 19.84 |
|                    | 0.625 | 3     | 23.01 |
|                    | 0.750 | 2 3/4 | 25.92 |
|                    | 0.875 | 2 1/2 | 28.57 |
| 4 1/2              | 1.000 | 2 1/4 | 30.95 |
|                    | 0.375 | 3 3/4 | 17.46 |
|                    | 0.500 | 3 1/2 | 21.16 |
|                    | 0.625 | 3 1/4 | 24.60 |
|                    | 0.750 | 3     | 27.78 |
|                    | 0.875 | 2 3/4 | 30.69 |
|                    | 1.000 | 2 1/2 | 33.33 |
|                    | 1.125 | 2 1/4 | 35.71 |
|                    | 1.250 | 2     | 37.83 |
| 4 3/4              | 0.375 | 4     | 18.52 |
|                    | 0.500 | 3 3/4 | 22.49 |

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 4 3/4              | 0.625 | 3 1/2 | 26.19 |
|                    | 0.750 | 3 1/4 | 29.63 |
|                    | 0.875 | 3     | 32.80 |
|                    | 1.000 | 2 3/4 | 35.71 |
| 5                  | 0.375 | 4 1/4 | 19.58 |
|                    | 0.500 | 4     | 23.81 |
|                    | 0.625 | 3 3/4 | 27.78 |
|                    | 0.750 | 3 1/2 | 31.48 |
|                    | 0.875 | 3 1/4 | 34.92 |
|                    | 1.000 | 3     | 38.09 |
|                    | 1.125 | 2 3/4 | 41.00 |
|                    | 1.250 | 2 1/2 | 43.65 |
|                    | 1.375 | 2 1/4 | 46.03 |
|                    | 1.500 | 2     | 48.14 |
| 5 1/4              | 0.375 | 4 1/2 | 20.63 |
|                    | 0.500 | 4 1/4 | 25.13 |
|                    | 0.625 | 4     | 29.36 |
|                    | 0.750 | 3 3/4 | 33.33 |
|                    | 0.875 | 3 1/2 | 37.03 |
|                    | 1.000 | 3 1/4 | 40.47 |
|                    | 1.125 | 3     | 43.65 |
|                    | 1.250 | 2 3/4 | 46.56 |
|                    | 1.375 | 2 1/2 | 49.20 |
|                    | 1.500 | 2 1/4 | 51.58 |
|                    | 1.625 | 2     | 53.70 |

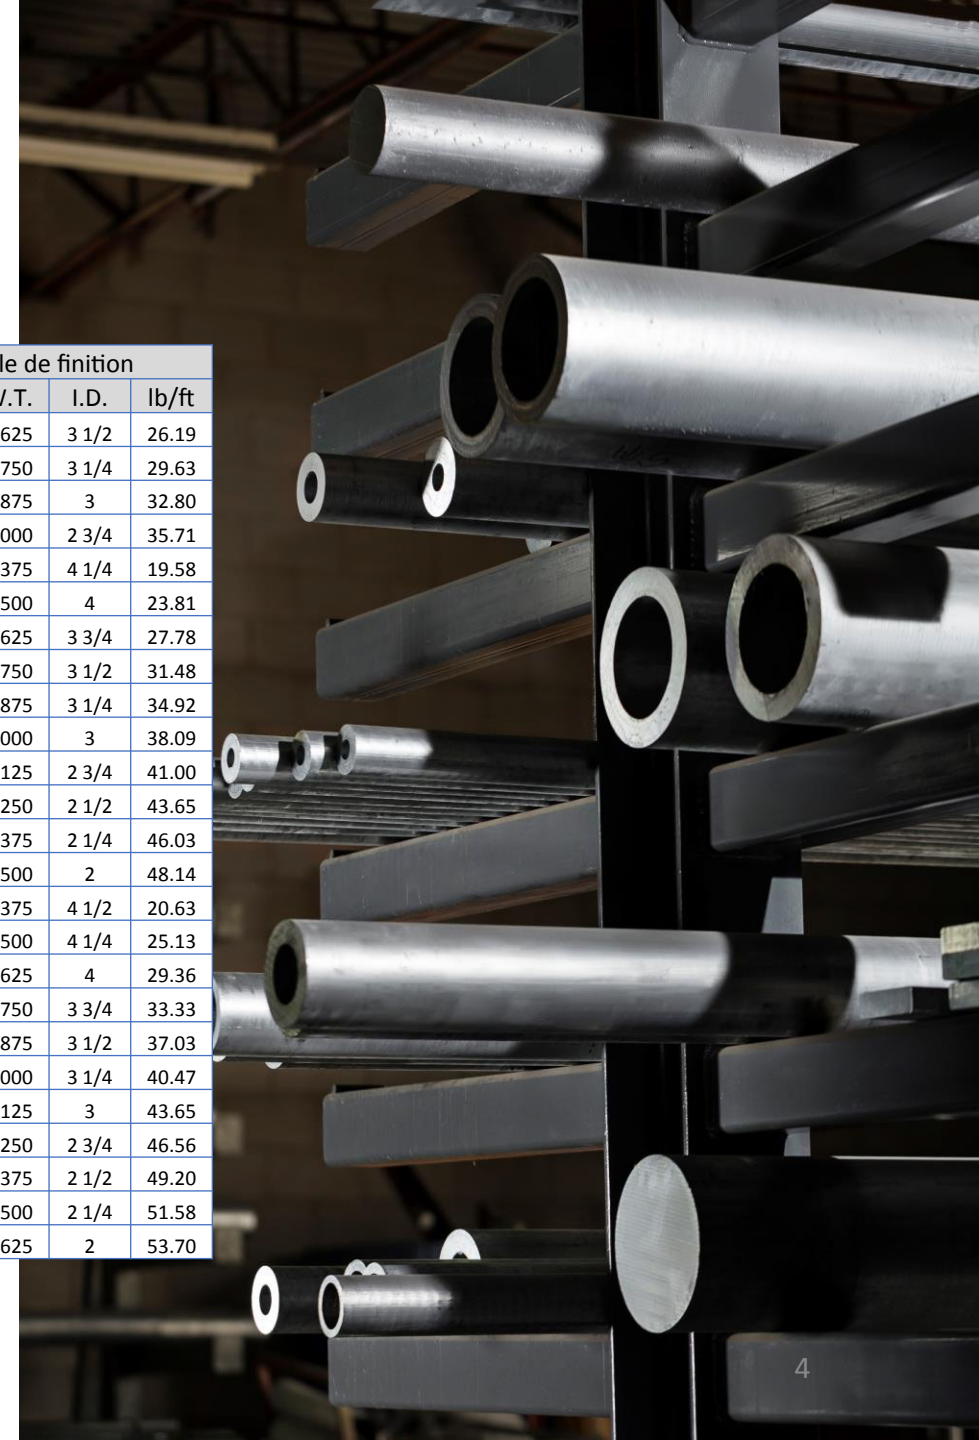

# CBB ZA 1 2 TAILLE DES STOCKS CREUX

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 5 1/2              | 0.375 | 4 3/4 | 21.69 |
|                    | 0.500 | 4 1/2 | 26.45 |
|                    | 0.625 | 4 1/4 | 30.95 |
|                    | 0.750 | 4     | 35.18 |
|                    | 0.875 | 3 3/4 | 39.15 |
|                    | 1.000 | 3 1/2 | 42.85 |
|                    | 1.125 | 3 1/4 | 46.29 |
|                    | 1.250 | 3     | 49.47 |
|                    | 1.375 | 2 3/4 | 52.38 |
|                    | 1.500 | 2 1/2 | 55.02 |
| 5 3/4              | 0.500 | 4 3/4 | 27.78 |
|                    | 0.625 | 4 1/2 | 32.54 |
|                    | 0.750 | 4 1/4 | 37.03 |
|                    | 0.875 | 4     | 41.27 |
|                    | 1.000 | 3 3/4 | 45.23 |
|                    | 1.125 | 3 1/2 | 48.94 |
|                    | 1.250 | 3 1/4 | 52.38 |
|                    | 1.375 | 3     | 55.55 |
| 6                  | 1.500 | 2 3/4 | 58.46 |
|                    | 0.500 | 5     | 29.10 |
|                    | 0.625 | 4 3/4 | 34.12 |
|                    | 0.750 | 4 1/2 | 38.89 |
|                    | 0.875 | 4 1/4 | 43.38 |
|                    | 1.000 | 4     | 47.62 |
|                    | 1.125 | 3 3/4 | 51.58 |

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 6                  | 1.250 | 3 1/2 | 55.29 |
|                    | 1.375 | 3 1/4 | 58.73 |
|                    | 1.500 | 3     | 61.90 |
|                    | 1.725 | 2 1/2 | 67.46 |
|                    | 0.500 | 5 1/4 | 30.42 |
| 6 1/4              | 0.625 | 5     | 35.71 |
|                    | 0.750 | 4 3/4 | 40.74 |
|                    | 0.875 | 4 1/2 | 45.50 |
|                    | 1.000 | 4 1/4 | 50.00 |
|                    | 1.125 | 4     | 54.23 |
|                    | 1.250 | 3 3/4 | 58.20 |
|                    | 1.375 | 3 1/2 | 61.90 |
|                    | 1.500 | 3 1/4 | 65.34 |
|                    | 0.500 | 5 1/2 | 31.74 |
|                    | 0.750 | 5     | 42.59 |
| 6 1/2              | 0.875 | 4 3/4 | 47.62 |
|                    | 1.000 | 4 1/2 | 52.38 |
|                    | 1.125 | 4 1/4 | 56.87 |
|                    | 1.250 | 4     | 61.11 |
|                    | 1.375 | 3 3/4 | 65.07 |
|                    | 1.500 | 3 1/2 | 68.78 |
| 6 3/4              | 0.500 | 5 3/4 | 33.07 |
|                    | 0.625 | 5 1/2 | 38.89 |
|                    | 0.750 | 5 1/4 | 44.44 |
|                    | 0.875 | 5     | 49.73 |

| Taille de finition |       |       |       |
|--------------------|-------|-------|-------|
| O.D.               | W.T.  | I.D.  | lb/ft |
| 6 3/4              | 1.000 | 4 3/4 | 54.76 |
|                    | 1.125 | 4 1/2 | 59.52 |
|                    | 1.250 | 4 1/4 | 64.02 |
|                    | 1.375 | 4     | 68.25 |
|                    | 1.500 | 3 3/4 | 72.22 |
|                    | 0.500 | 6     | 34.39 |
| 7                  | 0.750 | 5 1/2 | 46.29 |
|                    | 1.000 | 5     | 57.14 |
|                    | 1.250 | 4 1/2 | 66.93 |
|                    | 1.500 | 4     | 75.66 |
|                    | 0.500 | 6 1/4 | 35.71 |
|                    | 0.750 | 5 3/4 | 48.14 |
| 7 1/4              | 1.000 | 5 1/4 | 59.52 |
|                    | 1.250 | 4 3/4 | 69.84 |
|                    | 1.500 | 4 1/4 | 79.09 |
|                    | 0.500 | 6 1/2 | 37.03 |
| 7 1/2              | 0.750 | 6     | 50.00 |
|                    | 1.000 | 5 1/2 | 61.90 |
|                    | 1.250 | 5     | 72.75 |
|                    | 1.500 | 4 1/2 | 82.53 |
|                    | 0.500 | 6 3/4 | 38.36 |
| 7 3/4              | 0.750 | 6 1/4 | 51.85 |
|                    | 1.000 | 5 3/4 | 64.28 |
|                    | 1.250 | 5 1/4 | 75.66 |
|                    | 1.500 | 4 3/4 | 85.97 |
|                    | 0.500 | 7     | 66.66 |

| Taille de finition |       |       |        |
|--------------------|-------|-------|--------|
| O.D.               | W.T.  | I.D.  | lb/ft  |
| 8 1/4              | 0.500 | 7 1/4 | 41.00  |
|                    | 0.750 | 6 3/4 | 55.55  |
|                    | 1.250 | 5 3/4 | 81.48  |
|                    | 1.500 | 5 1/4 | 92.85  |
|                    | 1.750 | 4 3/4 | 103.17 |
|                    | 2.625 | 3     | 130.94 |
| 8 1/2              | 0.500 | 7 1/2 | 42.32  |
|                    | 0.750 | 7     | 57.40  |
|                    | 1.000 | 6 1/2 | 71.42  |
|                    | 1.250 | 6     | 84.39  |
|                    | 1.500 | 5 1/2 | 96.29  |
|                    | 1.750 | 5     | 107.13 |
| 8 3/4              | 0.500 | 7 3/4 | 43.65  |
|                    | 0.875 | 7     | 66.66  |
|                    | 1.500 | 5 3/4 | 99.73  |
|                    | 1.875 | 5     | 116.39 |
| 9                  | 0.500 | 8     | 44.97  |
|                    | 0.625 | 7 3/4 | 53.17  |
|                    | 0.750 | 7 1/2 | 61.11  |
|                    | 1.000 | 7     | 76.18  |
|                    | 1.250 | 6 1/2 | 90.20  |
|                    | 1.500 | 6     | 103.17 |
|                    | 1.625 | 5 3/4 | 109.25 |
|                    | 1.750 | 5 1/2 | 115.07 |
|                    | 2.000 | 5     | 125.92 |

Pour des diamètres supérieurs à 9 po et un support technique, veuillez contacter CBB